


## PANDSER® TOP XS

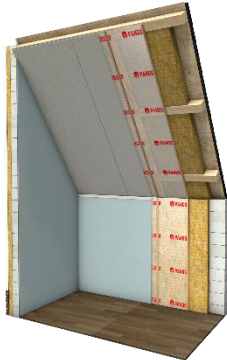

Construction membrane  
for installation on  
the warm side.

### GENERAL

Pandser® Top XS is a vapour-barrier and airtight multilayer LDPE-foil, reinforced with fibres. The transparent color of this membrane makes installation easier. Pandser® Top XS complies with the European standard EN 13984, type A.

Pandser® Top XS is available in the following dimensions:

Dimensions	Article number	EAN-code
1,50 x 25 meters	DWF10150-0015	8713331013510
1,50 x 50 meters	DWF10150-0016	8713331013541

### APPLICATION

Pandser® Top XS is used as a vapor barrier on the warm side in roof and facade constructions in new buildings and in renovation projects for constructions belonging to climate class 2 and 3 (homes, offices, etc.). For climate class 4 it is recommended to use a vapour-tight membrane (Pandser® Top Alu or Pandser® Aluflex). The reinforcement prevents potential damage to the airtightness. The membrane is also suitable as temporary glazing.

### PRODUCTPROPERTIES



Roof



Foundation



Facade



Hard surface



Soft surface



Waterproof



Vapour barrier

Essential characteristics	
Mass per unit area	140 gr/m <sup>2</sup>
Reaction to fire	F
Water tightness	Conforming
Water vapour transmission properties (Sd)	50 [m] (-10/+10)
Determination of resistance to impact	NPD (no performance determined)
Joint strength	NPD (no performance determined)
Maximum tensile force (MD/CMD)	>230 / >200 [N/50mm]
Resistance to tearing (MD/CMD)	>160 / >155 [N]
Elongation (MD)	>15 [%]
Elongation (CMD)	>15 [%]
Resistance to alkali	NPD (no performance determined)
Durability of water vapour resistance against ageing	Conforming

## INSTALLATION

Apply Pandser® Top XS with stainless steel staples (or galvanized nails with a wide head) on the warm side of the roof or facade constructions on the underlying construction (with the logo legible from the inside). An overlap of 100 mm must be maintained for the horizontal and vertical overlaps. All overlaps, fixings and openings must be adhered airtight using our corresponding Pandser® Toptape. For joining and (wall) connections we recommend our Pandser® Butyltape.

## RELATED PRODUCTS

Productname	Dimensions	Article number	EAN-code
Pandser® Toptape 0,06 x 25 M transparent	0,06 x 25 meters	VPM10300-9060	8713331014531
Pandser® Butyltape 0,02 x 15 M double sided	0,06 x 25 meters	VPM10300-9040	8713331028842